


# Technical data sheet

## Soft skirtings


### WL and WLK

Soft skirtings for PVC,  
linoleum and plastic floor  
coverings

WL

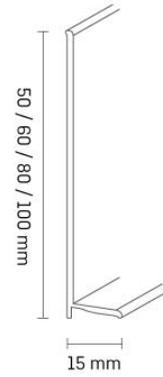

WLK

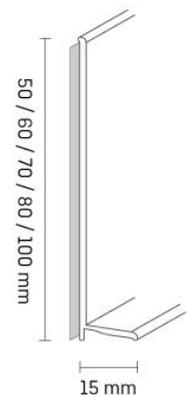

**Döllken Profiles**

SURTECO GROUP

## Installation recommendation



Adhesive tape  
UZIN



Rubber hammer



Döllken  
skirting scissors



Easy-  
Scooter

Before fixing the profiles, the wall must be checked for suitability for the respective fixing method. If possible, apply to smooth (max. 1 mm texture) and clean surfaces. The bonding surfaces must be dry, clean and free of grease. Loose wall surfaces such as wallpaper, paint, etc. are not suitable surfaces for bonding skirting boards. Soft skirting boards must always be laid without tension or stress. We recommend using UZIN Remur dry adhesive tape or a solvent-free contact adhesive to fix the soft skirting boards.

When installing the WLK variant, the protective paper of the adhesive tape must be removed and the profile pressed firmly and evenly against the wall. Additional tapping with a rubber mallet or rolling firmly with a wallpaper roller also increases adhesion to the substrate.



Processing videos and other helpful tips and tricks from professionals can be found at  YouTube

The soft skirtings offer a simple, clean and quick finish, create a harmonious connection between wall and floor and at the same time offer protection against dirt and moisture. The rolled-up skirtings are multifunctional and versatile and are particularly suitable for use with PVC, linoleum and plastic floor coverings or ceramics..

#### Product advantages

- Very elastic
- Easy to lay
- seamless corner formation due to lower restoring forces
- Less dirt accumulation/ better cleaning
- Rolls (50 m)
- Improved external corner formation up to 50 % time saving (with self-adhesive soft skirting boards)

#### Material

Soft skirtings consist of an elastic polyblend based on PVC. The self-adhesive "WLK" variants are additionally applied to the back of the profiles using a metal-reinforced, solvent-free special composite adhesive system.

#### Certificates



#### Delivery form

Packaging size:  
1 PU = 50 running metres (rolled)

Packaging: Cardboard packaging sealed with adhesive tape and PU paper labels with article labelling.

## Storage

Store flat, dry and protected from the weather. The profiles must be acclimatised flat in the building 24 hours before installation.

## Cleaning and care

Clean the lightly soiled surface with a damp cloth. For heavier soiling, use a commercially available household cleaning agent and follow the dosing instructions of the respective manufacturer. You should avoid cleaning agents with abrasive, acidic or bleaching ingredients. Do not use abrasive household sponges.

## Underground

The substrate must be permanently dry, hard, stable, level and free of grease, dust and silicone.

## Waste disposal

**20 01 39 Plastics Recommendation:** Can be deposited together with household waste or incinerated together with household waste in compliance with the necessary technical regulations after consultation with the disposal company and the competent authority.

**15 01 01 paper and cardboard packaging:** Completely emptied packaging can be recycled.

## Colours

You can find all current colours online on our website:  
<https://www.doellken-profiles.com/en/products/softskirtings/wl-50-60-80-100>

Simply scan with your smartphone and check the decors and colours:





The latest version of this data sheet can be found on our website at [doellken-profiles.com](https://doellken-profiles.com)

This data and technical information has been compiled on the basis of our experience and the latest state of the art. However, it can only be general information without any guarantee of properties, as we have no influence on the conditions on site, the execution of the work and the processing. The relevant recommendations, guidelines and DIN regulations as well as processing recommendations for the materials used must be observed. In case of doubt, carry out your own tests or obtain technical application advice. With the publication of this product data sheet, all previous product data sheets lose their validity.

Döllken Profiles GmbH  
Industriestraße 1  
59199 Bönen  
T: +49 3643 4170 711  
F: +49 3643 4170 330  
[info@doellken-profiles.com](mailto:info@doellken-profiles.com)  
[www.doellken-profiles.com](https://www.doellken-profiles.com)  
Follow us on   